



FORGED FITTINGS

MEASUREMENTS

ANSI B16.49 / DIN 2606 AND custom drawings

DIMENSIONS

½" – 216" / DN 10 – DN 5500

WALL THICKNESS

SCH 5S – SCH XXS

MATERIAL QUALITIES

ASTM A 234 WPA

ASTM A 234 WPB -

ASTM A 234 WPC - ASTM A 420 WPL6 -

WPHY 42/52/60/65/70

P235 – P265 – P245 – AE250 – ST 37 –ST35.8

ASTM A 234 WP1- WP11 - WP12 - WP22 -

WP5 - WP9 - WP91 - WP92 16 Mo 3,

13 CrMo 44, 10 CrMo 9 – 10

ASTM A 403 WP 304 / 304 L / 304 H

ASTM A 403 WP 321 / 321 H

ASTM A 403 WP 347 / 347 H

ASTM A 312 WP 316 / 316 L / 316 H/316 Ti

1.4301 / 1.4307 / 1.4541


1.4401 / 1.4404 / 1.4571

Duplex - Super Duplex - Inconel - Incoloy -

Monel - Hastelloy - Titanium / Ti-G

SWEDGE NIPPEL

ASME B16.11-2011

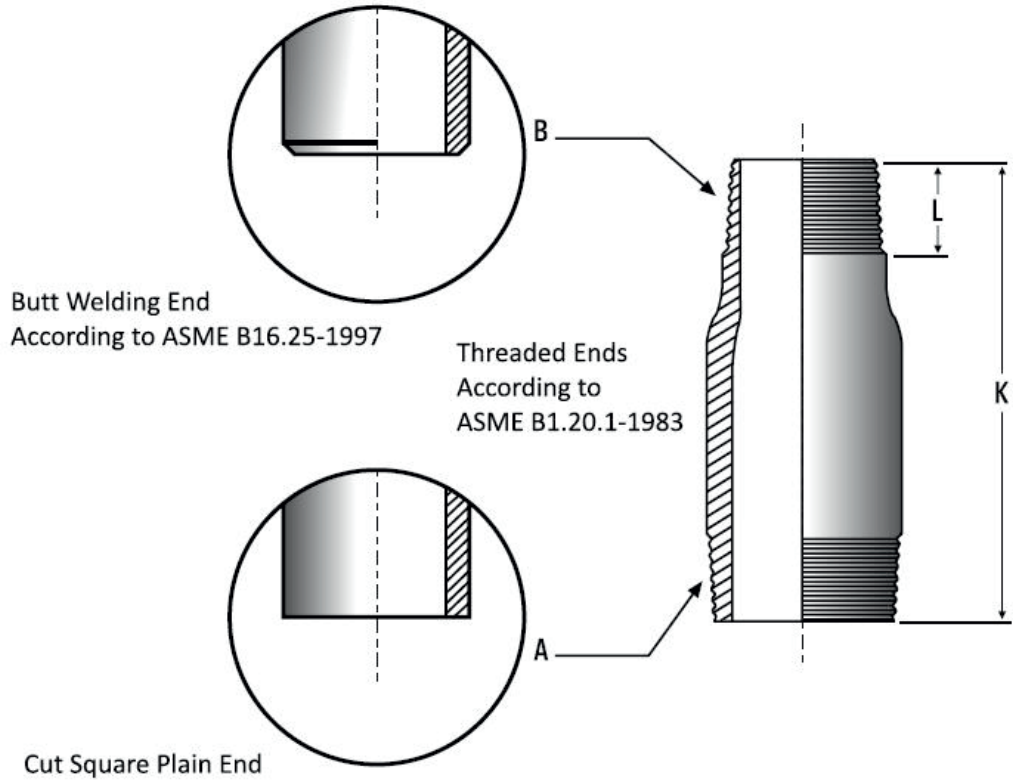

BORU NPS	K mm	L mm
3/8"x1/4"	76	20
1/2"x3/8"	89	20
1/2"x1/4"	89	20
3/4"x1/2"	95	21
3/4"x3/8"	95	21
1"x3/4"	102	22
1"x1/2"	102	22
1 1/4"x1"	102	25
1 1/2"x1 1/4"	114	25
1 1/2"x1"	114	25
1 1/2"x3/4"	114	25
2"x1 1/4"	165	30
2"x1 1/2"	165	30
2"x1"	165	30
2 1/2"x2"	178	35
3"x2"	203	40
4"x3"	230	45
4"x2"	230	45