
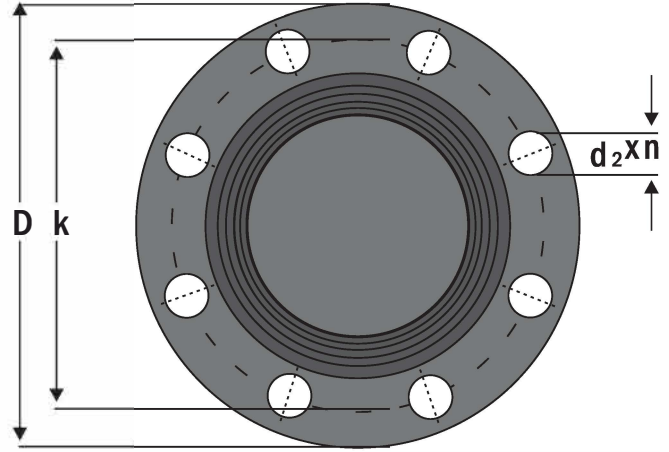


Blind Flanges PN 64

TS ISO 7005-1 - EN 1092-1

Tip 05 / Type 05

DIN 2527



PIPE	FLANGE			Raised Face			Drillings		Weight
DN	D	b	k	d4	f	n	screw	d2	kg
10	100	20	70	40	2	4	M12	14	1
15	105	20	75	45	2	4	M12	14	1,5
20	130	22	90	58	2	4	M16	18	2
25	140	24	100	68	2	4	M16	18	2,5
32	155	24	110	78	2	4	M20	22	3,5
40	170	26	125	88	2	4	M20	22	4,5
50	180	26	135	102	2	4	M20	22	5
65	205	26	160	122	2	8	M20	22	6
80	215	28	170	138	2	8	M20	22	7,5
100	250	30	200	162	2	8	M24	26	10,5
125	295	34	240	188	2	8	M27	30	16,5
150	345	36	280	218	2	8	M30	33	24,5
200	415	42	345	285	2	12	M33	36	40,5
250	470	46	400	345	2	12	M33	36	58
300	530	52	460	410	2	16	M33	36	83,5
350	600	56	525	465	2	16	M36	39	116
400	670	60	585	535	2	16	M39	42	155,5
500	800	-	705	615	2	20	M45	48	-
600	930	-	820	735	2	20	M52	56	-
700	1045	-	935	840	2	24	M52	56	-
800	1165	-	1050	960	2	24	M56	62	-
900	1285	-	1170	1070	2	28	M56	62	-
1000	1415	-	1290	1180	2	28	M64	70	-
1200	1665	-	1530	1380	2	32	M72x6	78	-

Ölçüler mm.'dir. / Dimensions are in mm.